


The ProJet® 6000 & 7000 offer the highest-quality parts for the toughest production applications

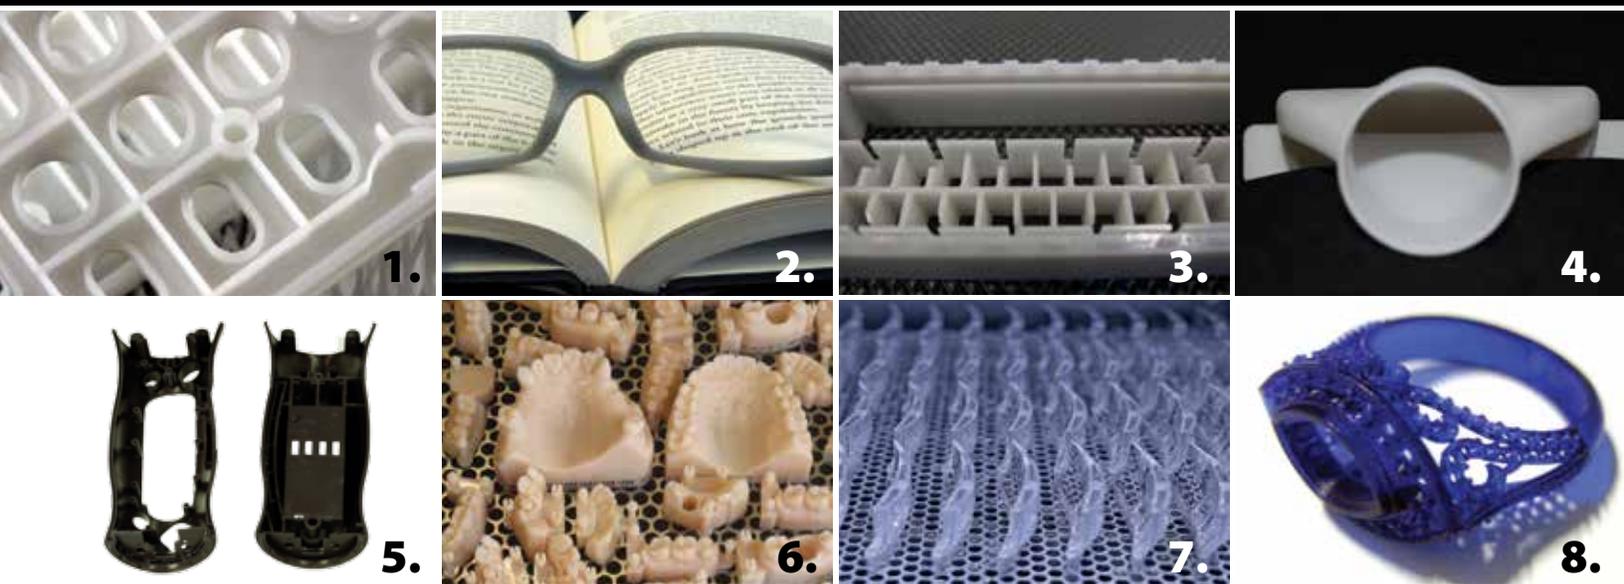

Highest precision. Highest accuracy. Highest quality.

1. VisiJet® SL Flex

- Polypropylene-like look and feel
- White opaque color
- High flexibility and shape retention
- High feature resolution and accuracy
- Ideal for snap-fits assemblies

2. VisiJet® SL Clear

- Polycarbonate-like look and feel
- Crystal-clear appearance
- Stiff and durable
- USP Class VI capable*
- Ideal for “see-thru” applications
- QuickCast™ capable to producing investment casting patterns

3. VisiJet® SL Tough

- PP/ABS-like performance
- Gray opaque color
- High durability and impact strength
- Ideal for form, fit and function testing
- Master patterns for RTV/Silicone molding

4. VisiJet® SL Impact

- PP/ABS-like performance
- White opaque color
- Exceptionally tough and durable
- Ideal for challenging functional assemblies and demanding applications
- Small lot direct manufacturing applications

5. VisiJet® SL Black

- ABS-like look and feel
- Black color
- High strength and good dimensional stability
- Ideal for automotive and consumer goods prototyping
- Ideal for electronics housing

6. VisiJet® SL e-Stone™

- Extreme accuracy and repeatability
- High-contrast peach color, replaces dental stone
- Ideal for crown and bridge restorations
- Working models for partial frameworks
- Orthodontic thermoforming applications

7. VisiJet® SL HiTemp

- High-temperature resistance to 130°C+ (266°F+)
- Translucent
- Humidity and chemically resistant with high rigidity
- Long term stable properties
- Ideal for under-the-hood component testing

8. VisiJet® SL Jewel


- Direct casting of jewelry patterns
- High contrast blue color
- Reduce cost and speed process with stone-in-place casting
- Models requiring high detail
- Excellent resolution and accuracy

VisiJet® SL Materials for ProJet 6000 & 7000 Printers

The wide range of VisiJet® SL engineered materials offers the toughest and the highest quality parts to meet a variety of commercial and production applications.

| Properties | ASTM | VisiJet® SL Flex | VisiJet® SL Tough | VisiJet® SL Clear | VisiJet® SL Black | VisiJet® SL Impact | VisiJet® SL HiTemp | VisiJet® SL e-Stone™ | VisiJet® SL Jewel |
|--|---------|--------------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
| Composition | | ----- UV Curable Plastic ----- | | | | | | | |
| Color | | White | Gray | Clear | Black | White | Clear Amber | Peach | Blue |
| Cartridge Volume | | 2.0 liters | 2.0 liters | 2.0 liters | 2.0 liters | 2.0 liters | 2.0 liters | 2.0 liters | 2.0 liters |
| Density (liquid) @ 25°C | | 1.14 g/cm ³ | 1.13 g/cm ³ | 1.1 g/cm ³ | 1.13 g/cm ³ | 1.12 g/cm ³ | 1.17 g/cm ³ | 1.13 g/cm ³ | 1.08 g/cm ³ |
| Density (solid) @ 25°C | | 1.19 g/cm ³ | 1.19 g/cm ³ | 1.17 g/cm ³ | 1.15 g/cm ³ | 1.18 g/cm ³ | 1.23 g/cm ³ | 1.19 g/cm ³ | 1.18 g/cm ³ |
| Tensile Strength | D 638 | 38 MPa | 41 MPa | 52 MPa | 45 MPa | 48 MPa | 66 MPa | 38 MPa | 40 MPa |
| Tensile Modulus | D 638 | 1620 MPa | 1890 MPa | 2560 MPa | 2150 MPa | 2626 MPa | 3390 MPa | 1630 MPa | 1910 MPa |
| Elongation at Break | D 638 | 16% | 18% | 6% | 5% | 14% | 6% | 17% | 12% |
| Flexural Strength | D 790 | 57 MPa | 62 MPa | 83 MPa | 76 MPa | 74 MPa | 112 MPa | 57 MPa | 61 MPa |
| Flexural Modulus | D 790 | 1420 MPa | 1850 MPa | 2330 MPa | 2350 MPa | 2390 MPa | 3080 MPa | 1550 MPa | 1824 MPa |
| Impact Strength (Notched Izod) | D 256 | 22 J/m | 44 J/m | 46 J/m | 47 J/m | 65 J/m | 26 J/m | 22 J/m | 45 J/m |
| Heat Distortion Temp. (HDT) @ 0.45 MPa | D 648 | 61 °C | 62 °C | 51 °C | 54 °C | 47 °C | 65/130 °C** | 61 °C | 38 °C |
| HDT @ 1.82 MPa | D 648 | 53 °C | 54 °C | 50 °C | 51 °C | 42 °C | 57/110 °C** | 53 °C | 32 °C |
| Hardness, Shore D | | 80 | 86 | 85 | 86 | 80 | 86 | 80 | 72 |
| Glass Transition (Tg) | DMA, E" | 60 °C | 52 °C | 70 °C | 62 °C | 65 °C | 62/132 °C** | 60 °C | 58 °C |
| USP Class VI Certified* | | No | No | Yes | No | No | No | No | No |
| ProJet Compatibility | | SD, HD, MP | SD, HD, MP | SD, HD, MP | SD, HD, MP | SD, HD, MP | SD, HD, MP | MP | HD, MP |

** After thermal postcure @ 160 °C

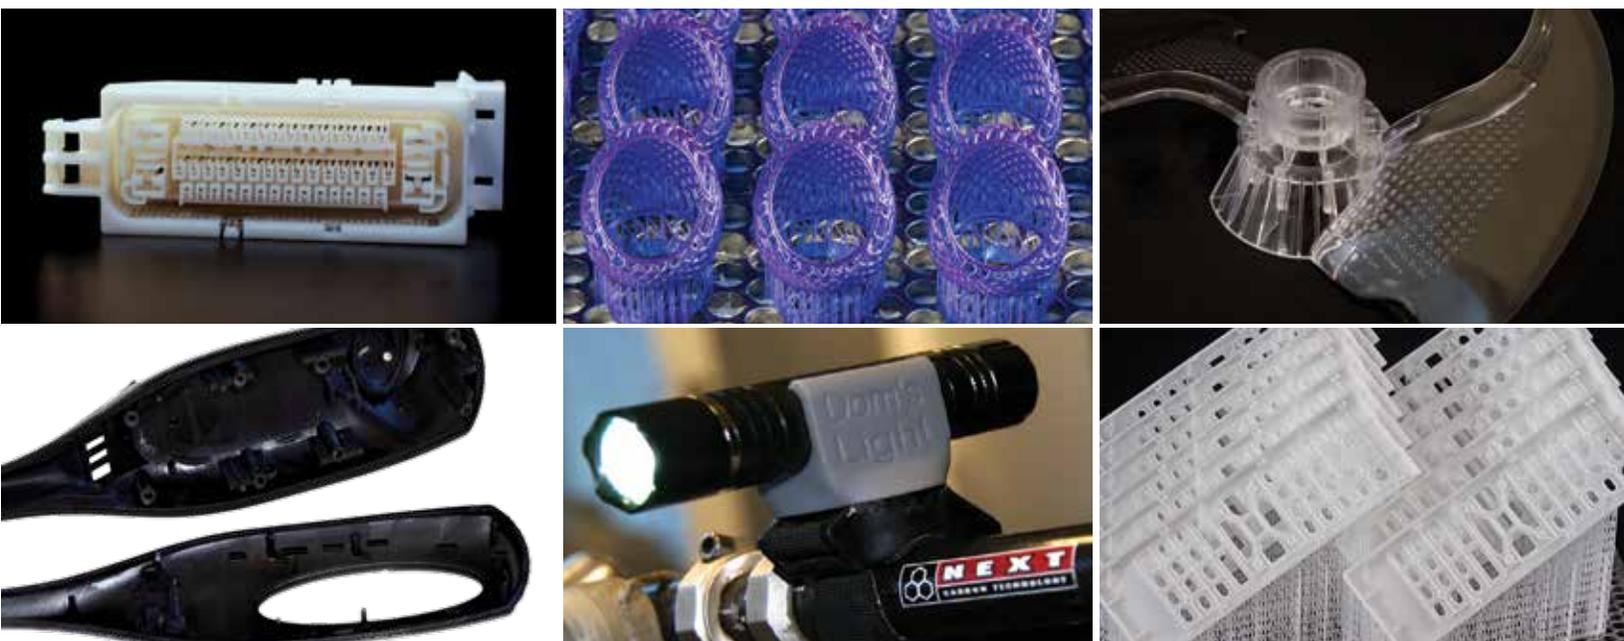

ProJet® 6000 & 7000

Professional 3D Printers



3DSYSTEMS®

Extend Innovation. Extend Production. Extend Choices.



ProJet 6000 SD ProJet 6000 HD ProJet 6000 MP ProJet 7000 SD ProJet 7000 HD ProJet 7000 MP

| | | | | | | |
|--|---|---------------------|---------------------|---|---------------------|---------------------|
| Net Build Volume (xyz) | | | | | | |
| Tall | 10 x 10 x 10 in (250 x 250 x 250 mm) | | | 15 x 15 x 10 in (380 x 380 x 250 mm) | | |
| Medium | 10 x 10 x 5 in (250 x 250 x 125 mm) | | | N/A | | |
| Short | 10 x 10 x 2 in (250 x 250 x 50 mm) | | | 15 x 15 x 2 in (380 x 380 x 50 mm) | | |
| Resolution | | | | | | |
| HD - 0.125 mm layers | • | • | • | • | • | • |
| UHD - 0.100 mm layers | • | • | • | • | • | • |
| XHD - 0.050 mm layers | | | | | | |
| Accuracy | 0.001-0.002 inch per inch (0.025-0.05 mm per 25.4 mm) of part dimension Accuracy may vary depending on build parameters, part geometry and size, part orientation and post-processing methods | | | 0.001-0.002 inch per inch (0.025-0.05 mm per 25.4 mm) of part dimension Accuracy may vary depending on build parameters, part geometry and size, part orientation and post-processing methods | | |
| Materials | | | | | | |
| VisiJet® SL Flex | • | • | • | • | • | • |
| VisiJet® SL Tough | • | • | • | • | • | • |
| VisiJet® SL Clear | • | • | • | • | • | • |
| VisiJet® SL Black | • | • | • | • | • | • |
| VisiJet® SL Impact | • | • | • | • | • | • |
| VisiJet® SL HiTemp | • | • | • | • | • | • |
| VisiJet® SL e-Stone™ | • | • | • | • | • | • |
| VisiJet® SL Jewel | • | • | • | • | • | • |
| Material Packaging | Material in clean no drip 2.0 litre cartridges. System auto fills print tray between builds | | | Material in clean no drip 2.0 litre cartridges. System auto fills print tray between builds | | |
| Electrical | 100-240 VAC, 50/60 Hz, single-phase, 750 W | | | 100-240 VAC, 50/60 Hz, single-phase, 750 W | | |
| Dimensions (WxDxH) | | | | | | |
| 3D Printer Crated | 66 x 35 x 79 in (1676 x 889 x 2006 mm) | | | 73.5 x 38.5 x 81.5 in (1860 x 982 x 2070 mm) | | |
| 3D Printer Uncrated | 31 x 29 x 72 in (787 x 737 x 1829 mm) | | | 39.0 x 34.0 x 72 in (984 x 854 x 1829 mm) | | |
| Weight | | | | | | |
| 3D Printer Crated | 600 lb (272 kg) | 600 lb (272 kg) | 600 lb (272 kg) | 800 lb (363 kg) | 800 lb (363 kg) | 800 lb (363 kg) |
| 3D Printer Uncrated | 400 lb (181 kg) | 400 lb (181 kg) | 400 lb (181 kg) | 600 lb (272 kg) | 600 lb (272 kg) | 600 lb (272 kg) |
| 3D Manage Software | Easy build job set-up, submission and job queue management Automatic part placement and build optimization tools Part stacking and nesting capability Extensive part editing tools Automatic support generation Job statistics reporting | | | Easy build job set-up, submission and job queue management Automatic part placement and build optimization tools Part stacking and nesting capability Extensive part editing tools Automatic support generation Job statistics reporting | | |
| MP Auto Software | Automation utility for rapid manufacturing applications. Included only with the ProJet 6000 MP | | | Automation utility for rapid manufacturing applications. Included only with the ProJet 7000 MP | | |
| Network Compatibility | Network ready with 10/100 Ethernet interface 4MB | | | Network ready with 10/100 Ethernet interface 4MB | | |
| 3D Manage Hardware Recommendation | Core 2 Duo 1.8 GHz with 4 GB RAM (OpenGL support 128 Mb video RAM) | | | Core 2 Duo 1.8 GHz with 4 GB RAM (OpenGL support 128 Mb video RAM) | | |
| 3D Manage Operating System | Windows XP Professional, Windows Vista, Windows 7 | | | Windows XP Professional, Windows Vista, Windows 7 | | |
| Input Data File Formats Supported | STL and SLC | STL and SLC | STL and SLC | STL and SLC | STL and SLC | STL and SLC |
| Operating Temperature Range | 64-82 °F (18-28 °C) | 64-82 °F (18-28 °C) | 64-82 °F (18-28 °C) | 64-82 °F (18-28 °C) | 64-82 °F (18-28 °C) | 64-82 °F (18-28 °C) |
| Noise | < 65 dBa estimated | < 65 dBa estimated | < 65 dBa estimated | < 65 dBa estimated | < 65 dBa estimated | < 65 dBa estimated |
| Optional Accessories | UV Curing Units, Parts Washer and Right Height Table, ProJet® Cart Station | | | UV Curing Units, ProJet® Cart Station | | |
| Certifications | CE marked | CE marked | CE marked | CE marked | CE marked | CE marked |



USA
Tel: +1 803.326.3900
moreinfo@3dsystems.com

UK
Tel: +44 1442 282 600
info@3dsystems-europe.com

**Germany, Scandinavia,
Eastern Europe, Middle East**
Tel: +49 6151 357 0
info@3dsystems-europe.com

Asia-Pacific
Melbourne Tel: +61 3 9819 4422
Sydney Tel: +61 2 9516 5571
3dprinters.asiapac@3dsystems.com

Warranty/Disclaimer: The performance characteristics of these products may vary according to product application, operating conditions, material combined with, or with end use. 3D Systems makes no warranties of any type, express or implied, including, but not limited to, the warranties of merchantability or fitness for a particular use.

© 2014 by 3D Systems Inc. All rights reserved. Specifications subject to change without notice. ProJet, VisiJet, 3D Systems and the 3D Systems logo are registered trademarks of 3D Systems, Inc. Windows is a registered trademark of Microsoft Corporation.

ProJet® 6000 & 7000

Professional 3D Printers



3DSYSTEMS®

Step up to the gold standard in 3D printing with genuine SLA®

Take advantage of the unrivaled precision, surface quality, range of materials, reliability and speed of Stereolithography at a lower cost with the ProJet® 6000 and 7000 SLA 3D printer series. These highly productive systems offer all the benefits of SLA in a smaller footprint, so you can print parts for prototyping, rapid tooling and end-use with fine feature detail and exceptional mechanical properties, all at a lower per-part cost than other print technologies.

The ProJet 6000 and 7000 print at a resolution equivalent to 4000 DPI*, with more consistent mechanical properties in all three axes than other print technologies. Both systems are available in three models—SD, HD and MP—and in configurations up to 380 x 380 x 250 mm (15 x 15 x 10 in).

The ProJet 6000 and 7000 use a wide choice of VisiJet® performance-engineered materials that match or exceed traditional plastic properties, including resistance to high temperature, tensile strength and impact strength. VisiJet SL Clear is also USP Class VI certified, making it ideal for medical product manufacturing, especially in mass custom manufacturing projects such as hearing aids and dental applications.

* Equivalent DPI based on laser spot location resolution of 0.00635 mm in 3DS testing



www.3dsystems.com

MANUFACTURING THE FUTURE